

# TAURUS




ESTRAIBILE ED ORIENTABILE  
CON 1, 2, O 3 PUNTI LUCE, BIANCO O NERO.

Taurus, apparecchio da interni per installazione a soffitto o parete di cartongesso, dotato di incasso in Coral® e faretto estraibile, evidenzia con precisione ed eleganza ogni dettaglio dello spazio progettuale. Taurus, grazie alla direzionalità e all'intercambiabilità delle lenti, risponde con precisione alle necessità di una luce precisa, decisa e concreta. Il proiettore può essere posizionato in diversi modi, dalla posizione completamente esterna a quella retrocessa. Quest'ultima posizione è studiata per avere il minimo impatto visivo. Quando il proiettore non è retrocesso è orientabile di 360° sull'asse orizzontale e 90° sull'asse verticale. Le dimensioni compatte e il design minimale lo rendono la soluzione ideale per illuminare gli ambienti con discrezione.

EXTRACTABLE AND ADJUSTABLE  
WITH 1, 2 OR 3 LIGHT POINTS, BLACK OR WHITE.

*Taurus, an indoor totally disappearing luminaire installable on plasterboard ceilings or walls, with a recessed body made of Coral® and an extractable projector, underlines spaces and details with a precise and elegant beam of light. Thanks to the orientable and interchangeable lens, Taurus appropriately answers to the necessity of obtaining a sharp, precise and concrete light. The projector can be oriented in several ways, in a completely external position or in a recessed one. The latter, conceived to obtain a minimal visual impact. When the projector is not recessed it is 360° adjustable on the horizontal line and 90° on the vertical one. The solid forms and the minimal design makes this luminaire perfect for illuminating the environment in a discreet manner.*

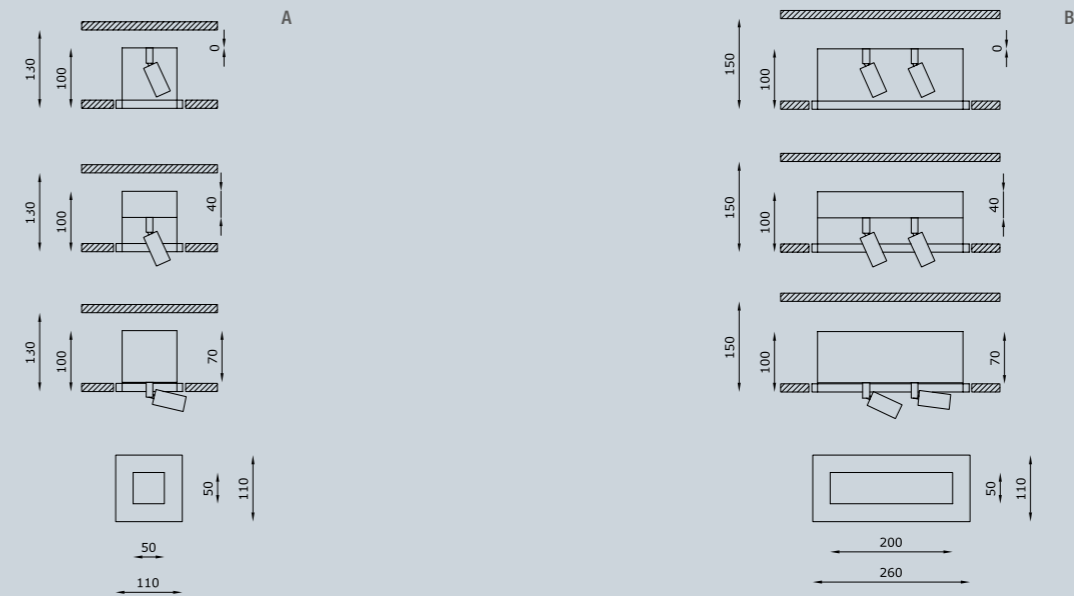


## TECHNICAL FEATURES

Code	1831.00 (fig.A)	1834.00 (fig.A)	1832.00 (fig.B)	1835.00 (fig.B)
Type	Tilttable downlight ± 360° / ± 90°	Tilttable downlight ± 360° / ± 90°	Tilttable downlight ± 360° / ± 90°	Tilttable downlight ± 360° / ± 90°
Material	00: Coral®	00: Coral®	00: Coral®	00: Coral®
Finishing	Black	White	Black	White
Weight	1 Kg	1 Kg	2 Kg	2 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP40	IP40	IP40	IP40
Insulation class	III	III	III	III
Control gear	Constant current electronic driver (not included)	Constant current electronic driver (not included)	Constant current electronic driver (not included)	Constant current electronic driver (not included)
Cut out for plasterboard	120 x 120 mm	120 x 120 mm	270 x 120 mm	270 x 120 mm
Lamp type	LED 500 mA ⚡ Vt: 11 VDC	LED 500 mA ⚡ Vt: 11 VDC	LED 500 mA ⚡ Vt: 2 x 11 VDC	LED 500 mA ⚡ Vt: 2 x 11 VDC
Lamp wattage	1 x 6W	1 x 6W	2 x 6W	2 x 6W
Luminous efficacy	520 lm - 3000K	520 lm - 3000K	2 x 520 lm - 3000K	2 x 520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)	Beam 22° Beam 50° (on request)	Beam 22° Beam 50° (on request)	Beam 22° Beam 50° (on request)
Fitting	-	-	-	-
Light colour	White 3000K White 2700K   4000K (on request)	White 3000K White 2700K   4000K (on request)	White 3000K White 2700K   4000K (on request)	White 3000K White 2700K   4000K (on request)
Light hole	50 x 50 mm	50 x 50 mm	50 x 200 mm	50 x 200 mm
Voltage connection	By driver (optional)	By driver (optional)	By driver (optional)	By driver (optional)
CRI	>90	>90	>90	>90
Emergency	-	-	-	-
Energy efficiency class	A++	A++	A++	A++
Note	On request available dimmable PUSH or DALI, remote installation.	On request available dimmable PUSH or DALI, remote installation.	On request available dimmable PUSH or DALI.	On request available dimmable PUSH or DALI.

## OPTIONAL ACCESSORIES

product code	optional code	description	info
1831.00 / 1834.00	H8500.E	Constant current electronic driver. Remote installation	Suitable for n°3 code 1831.00 / 1834.00 - 500 mA
	H8500.C	Constant current electronic driver	Suitable for n°1 code 1831.00 / 1834.00 - 500 mA
1832.00 / 1835.00	H8500.E	Constant current electronic driver	Suitable for n°1 code 1832.00 / 1835.00 - 500 mA

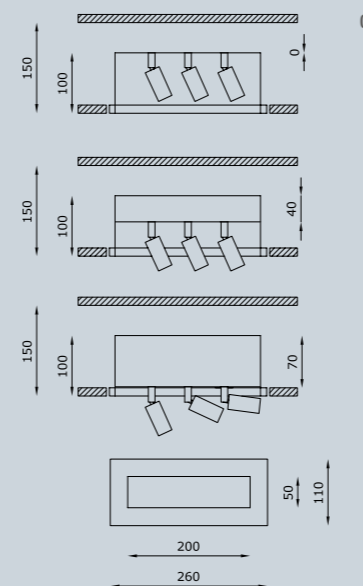

TECHNICAL FEATURES

Code	<b>1833.00</b> (fig.C)	<b>1836.00</b> (fig.C)
Type	Tiltable downlight ± 360° / ± 90° 	Tiltable downlight ± 360° / ± 90° 
Material	00: Coral®	00: Coral®
Finishing	Black	White
Weight	2.1 Kg	2.1 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP40	IP40
Insulation class	III	III
Control gear	Constant current electronic driver (not included)	Constant current electronic driver (not included)
Cut out for plasterboard	270 x 120 mm	270 x 120 mm
Lamp type	LED 500 mA Vf: 3 x 11 VDC	LED 500 mA Vf: 3 x 11 VDC
Lamp wattage	3 x 6W	3 x 6W
Luminous efficacy	3 x 520 lm - 3000K	3 x 520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)	Beam 22° Beam 50° (on request)
Fitting	-	-
Light colour	White 3000K White 2700K   4000K (on request)	White 3000K White 2700K   4000K (on request)
Light hole	50 x 200 mm	50 x 200 mm
Voltage connection	By driver (optional)	By driver (optional)
CRI	>90	>90
Emergency	-	-
Energy efficiency class	A++	A++
Note	On request available dimmable PUSH or DALI.	On request available dimmable PUSH or DALI.

OPTIONAL ACCESSORIES

product code	optional code	description	info
<b>1833.00 / 1836.00</b>	<b>H8500.E</b>	Constant current electronic driver	Suitable for n°1 code 1833.00 / 1836.00 - 500 mA



Private villa - Arch. E. Corti - Cap Ferrat Côte d'Azur