


ARMILLA

F50B0101

Lorenzo Truant



Dimensions



Description

Lampada da tavolo con diffusore in vetro soffiato bianco lucido, anelli bruniti, base e calotta bianchi.

Voltage

220-240V

Socket

1xE27

Material

Glass - Metal

Light source and alternative bulbs

cod. A10234C01

E27 1x13W - LED
Max Watt. 150W

Available diffuser colours

White

Not included accessories

Bulb

Available structure colours

Burnished / White

Other colours available

Weight Lamp

Net: 2.93 kg

Packaging

Gross weight: 0 kg
Volume: 0 m³
Number of boxes: 1

Specs

EAC IP40

In the same family



Pendant



SYDNEY - MELBOURNE - GOLD COAST - PERTH - AUCKLAND
G45, 76-84 WATERWAY DRIVE COOMERA, QLD, 4209, AUSTRALIA

Phone: +61 417 950 455

Email: showroom@gineico.com

WWW.GINEICOLIGHTING.COM.AU

MINIFRAME

Fixed recessed luminaire for integrated LED source or for GU10 230V/240V LED Light bulb. Remote power supply available as accessory for the integrated LED sources. Body and frame in painted metal. It can, also, be installed in concrete or brick ceilings using a special galvanized metal outercasing available as accessory. IP20/IP23.







GINEICO



MINIFRAME 393

SYDNEY - MELBOURNE - GOLD COAST - PERTH - AUCKLAND



SYDNEY - MELBOURNE - GOLD COAST - PERTH - AUCKLAND
G45, 76-84 WATERWAY DRIVE COOMERA, QLD, 4209, AUSTRALIA

Phone: +61 417 950 455

Email: showroom@gineico.com

WWW.GINEICOLIGHTING.COM.AU

MINIFRAME Recessed 35

code LT4102.927F/01





PRODUCT DESCRIPTION

Recessed with frame indoor direct emission lamp, complete of led 5W beam 37°, color rendering index CRI >90. White finishing direct emission lamp

PRODUCT FEATURES

Mounting method	recessed with frame
Wattage	5W
Color temperature	2700K
Color rendering index	>90
Optics	37°
Finishing	white
Source luminous flux	456 lm
Luminous flux	431 lm
Fitting efficiency	86 lm/W
Chromaticity tolerance (initial 3 MacAdam)	
Estimated average life expectancy	50000h L90 B10 ta 25°C
Ballast	not included
Protocol	see power supplies
Energy efficiency class	A++
Dimension	H 110 mm
Protection degree	IP20
Installation hole	mm 52X52
Class of protection	Class III appliance

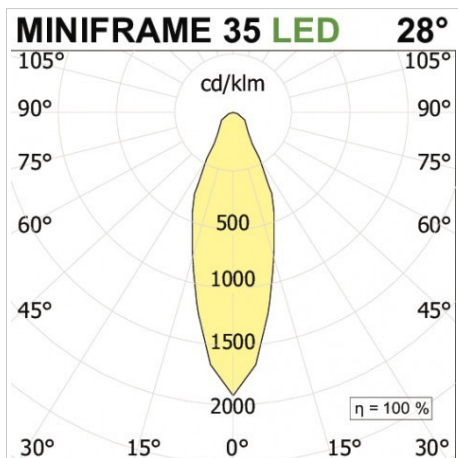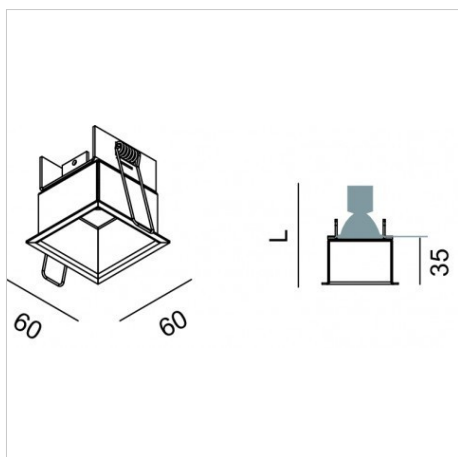

SYDNEY - MELBOURNE - GOLD COAST - PERTH - AUCKLAND
G45, 76-84 WATERWAY DRIVE COOMERA, QLD, 4209, AUSTRALIA



Phone: +61 417 950 455

Email: showroom@gineico.com

WWW.GINEICOLIGHTING.COM.AU

MINIFRAME Recessed 50

code LT4107.927F/01

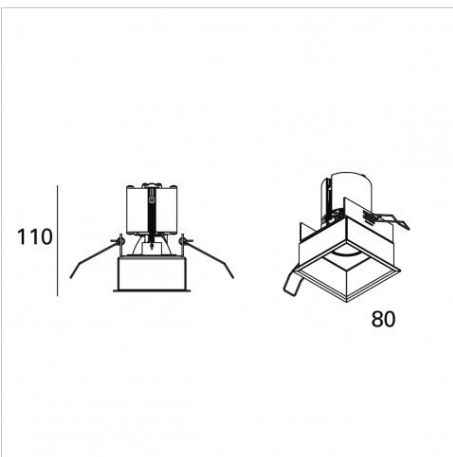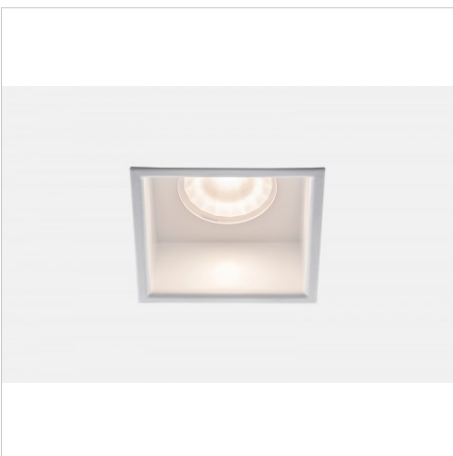

PRODUCT DESCRIPTION

Recessed with frame/ceiling surface mounted indoor fixture/direct emission lamp, complete of led 6,8W beam 24°, color rendering index CRI >90. White finishing fixture/direct emission lamp. x

PRODUCT FEATURES

Mounting method	recessed with frame, ceiling surface mounted
Lamps	LED
Wattage	6,8W
Color temperature	2700K
Color rendering index	>90
Optics	24°
Finishing	white
Source luminous flux	480 lm
Luminous flux	321 lm
Fitting efficiency	47 lm/W
Chromaticity tolerance (initial MacAdam)	3
Estimated average life expectancy	3SDCM 50000h L90 B10 ta 25°C
Ballast	not included
Protocol	see power supplies
Energy efficiency class	A+
Dimension	80x80 L 110 mm
Protection degree	IP20
Installation hole	mm 72X72
Class of protection	Class III appliance

