



IFERROSI SISTEMA

PALI POLES

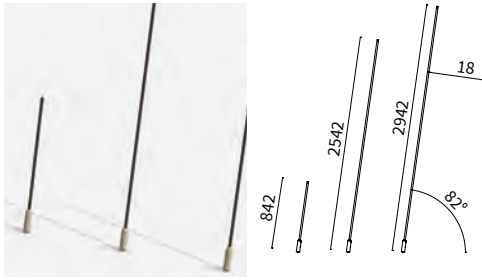


H	CODE	Col.
800	IF40.800	/46
2500	IF40.2500	/99
2900	IF40.2900	

PALO 1200 CON BASE POLE 1200 WITH BASE




ø base	ø	H	CODE	Col.
120	18	1200	IF41.1200	/99

PALO 700 CON BASE POLE 700 WITH BASE




ø base	ø	H	CODE	Col.
55	8	700	IF42.700	/99

MODULO INTERMEDIO INTERMEDIATE MODULE



ø	H	CODE	Col.
18	250	IF43.250	/99


TERMINALE CLOSING MODULE



ø	H	CODE	Col.
18	250	IF44.250	/99

OUTDOOR


ELEMENTO SPOT 120
SPOT 120



LED		Im product/beam 3000K			CODE	Col.			
W	mA	ø spot	Kg	21°			24°	39°	
18	500	120	1,3	1642	1483	1473	IF50.9		/44C /99
<ul style="list-style-type: none"> ● Kelvin 30 3000K 40 4000K 	<ul style="list-style-type: none"> ● Beam S 21° F 24° W 39° 								

500 CE


ELEMENTO SPOT 60
SPOT 60



LED		Im product/beam 3000K			CODE	Col.			
W	mA	ø spot	Kg	21°			41°		
6,7	700	60	0,8	417	443		IF51.9		/44C /99
<ul style="list-style-type: none"> ● Kelvin 27 2700K 30 3000K 40 4000K 	<ul style="list-style-type: none"> ● Beam F 21° W 41° 								

700 CE


ELEMENTO SPOT 36
SPOT 36



LED		Im product/beam 3000K			CODE	Col.			
W	mA	ø spot	Kg	19°			33°		
8	700	36	0,3	665	695		IF52.9		/99
<ul style="list-style-type: none"> ● Kelvin 27 2700K 30 3000K 40 4000K 	<ul style="list-style-type: none"> ● Beam S 19° F 33° 								


700 CE

BASE DA APPOGGIO
SUPPORTING BASE




ø	Kg	CODE	Col.
450	11,4	IF70	/99

FLANGIA DI FISSAGGIO
PLATE TO FIX










ø	Kg	CODE	Col.
120	0,40	IF71	/99

ZANCA PER CALCESTRUZZO
HANGER FOR CONCRETE




Dim.	Kg	CODE
327X327	3,5	IF72



PICCHETTO PER TERRENO

PEGS FOR ANCHORING TO THE GROUND



Dim.	Kg	CODE
120X202	0,25	IF73

Dim.	Kg	CODE
55X200	0,25	IF74

ALIMENTATORE ON/OFF IP20

POWER SUPPLIER ON/OFF IP20



∅	mA	CODE
120	500	IF76
60	700	IF77
36	350	IF78

ALIMENTATORE DALI IP20

POWER SUPPLIER DALI IP20



∅	mA	DALI	CODE
120	500	x	IF76D
60	700	x	IF77D
36	350	x	IF78D

ALIMENTATORE ON/OFF IP64

POWER SUPPLIER ON/OFF IP64



∅	mA	CODE
120	500	IF79
60	700	IF80
36	350	IF81

ALIMENTATORE DALI IP64


POWER SUPPLIER DALI IP64



∅	mA	DALI	CODE
120	500	x	IF79D
60	700	x	IF80D
36	350	x	IF81D

SCATOLA DI CABLAGGIO IP67 PER ALLOGGIAMENTO DRIVER

WIRING BOX IP67 FOR HOUSING DRIVER



CODE
IF75

CAVO IN NEOPRENE 2 X DOPPIO RIVESTIMENTO

NEOPRENE CABLE 2 X DOUBLE COATED



∅	L. mm	CODE
10	5000	IF82.5000
10	10000	IF82.10000

CONNETTORE IP67

CONNECTOR IP67



CODE
IF83