



GENIUS CONCRETE IP65

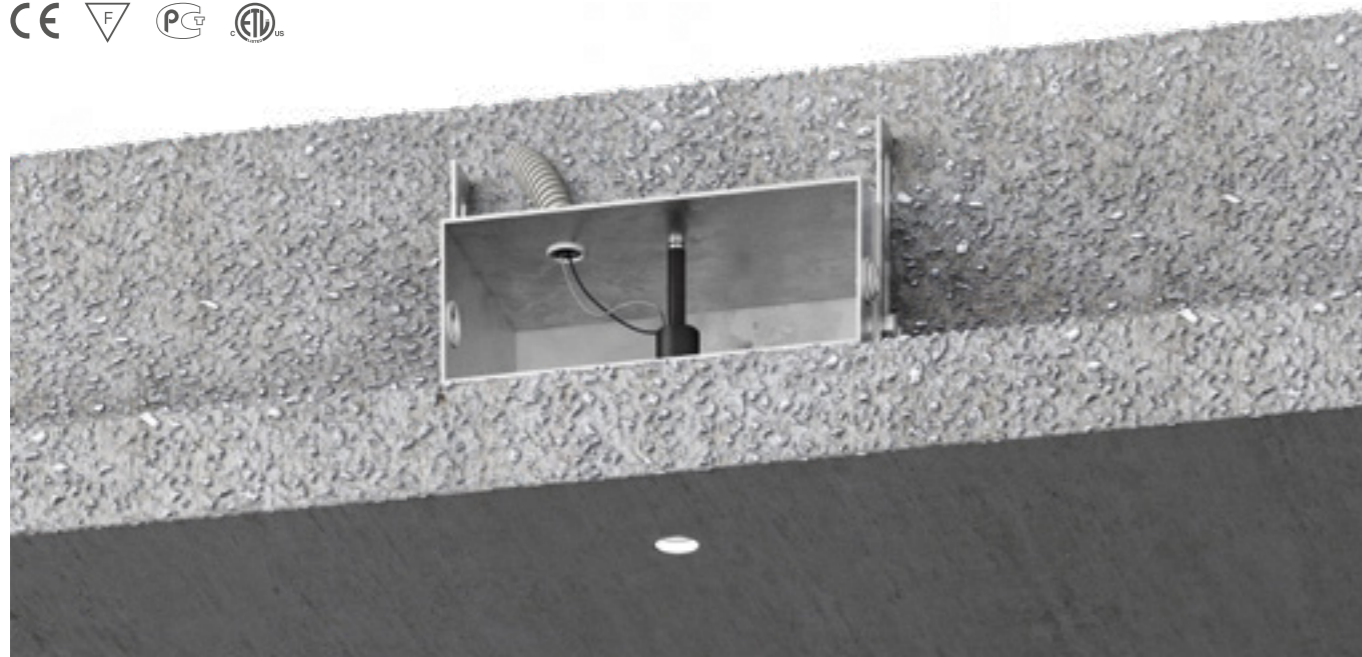

CODE COMPOSITION

1077 BL 4 R 22 E _ WD

light colour

27	2700K
30	3000K
40	4000K

example of code composition 1077 BL 4 R 22 E 30 WD

TECHNICAL FEATURES

Code	1077 XX
Type	Downlight 90°
Material	Aluminum
Finishing	Black
Weight	0.4 Kg
Mounting	Ceiling recessed
IP rating	IP65
Insulation class	III
Control gear	Remote constant current electronic driver (not included)
Cut out for plasterboard	-
Lamp type	LED 500 mA Vf: 11.5 VDC
Lamp wattage	1 x 6W
Luminous efficacy	600 lm - 3000K
Light distribution	Beam 22°
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	By driver (optional)
CRI	>90
Emergency	-
Note	On request available dimmable PUSH or DALI.



matt black

LUCE INTEGRATA NEL CEMENTO FACCIA A VISTA.

Genius Concrete IP65 è la variante più rivoluzionaria della linea Genius: un apparecchio a scomparsa totale per interni, concepito per superfici in cemento faccia-vista ed installabile durante la fase di getto del calcestruzzo.

Mantiene le prestazioni del Genius, ma ha un corpo lampada semplificato che funziona come cassaforma a perdere, con la parte elettrica estraibile direttamente dal foro luce, grazie ad un nuovo brevetto che permette l'estrazione e la sostituzione della sorgente LED. L'unica apertura visibile è il foro da 23 mm, senza la necessità di alcuna scatola di ispezione ed è installabile per getti con spessore minimo di 12 mm.

INTEGRATED LIGHT IN EXPOSED CEMENT.

Genius Concrete IP65 is the most revolutionary version of the Genius line: a totally recessed indoor luminaire, designed for exposed cement surfaces and installable during the concrete casting phase.

It maintains all the performances of the Genius, but has a simplified lamp body which functions as formwork, with the electrical part removable from the light hole, thanks to a new patent which allows the LED light source to be pulled out and replaced.

The only visible aperture is the 23 mm (0.90") outlet, so there is no need for any inspection hatch, and it can be installed with a minimum concrete cover of 12 mm (0.47").

OPTIONAL ACCESSORIES

product code	optional code	description	info
1075 XX	H8500.E	Constant current electronic driver. Remote installation	Suitable for n°3 code 1075 XX - 500 mA